



MASON INDUSTRIES, Inc.


Manufacturers of Vibration Control Products
 350 Rabro Drive 2101 W. Crescent Ave., Suite D
 Hauppauge, NY 11788 Anaheim, CA 92801
 631/348-0282 714/535-2727
 FAX 631/348-0279 FAX 714/535-5738
 Info@Mason-Ind.com Info@MasonAnaheim.com
 www.Mason-Ind.com

JOB NAME _____
 CUSTOMER _____
 CUSTOMER P.O. _____
 MASON M.I. _____
 DWG. NO. _____

Super W Waffle Pad


MATERIAL:

- Natural Rubber
- Standard Neoprene
- AASHTO Bridge Bearing Neoprene

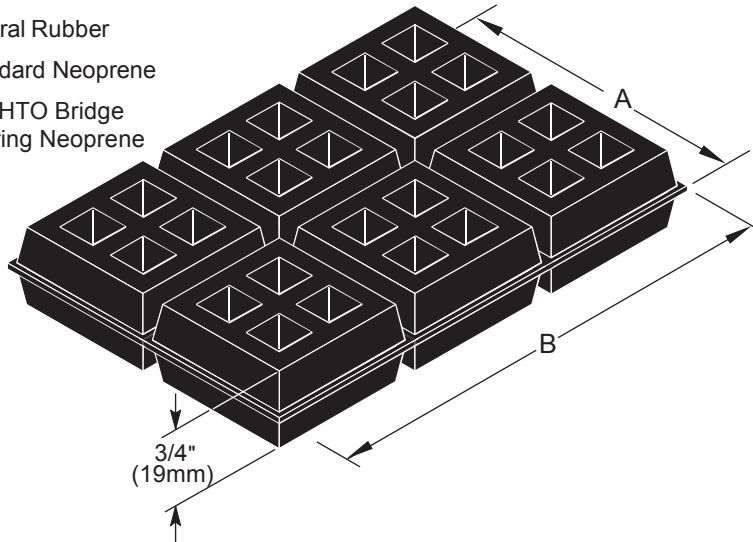

FULL SIZED SHEETS
 are 18 x 18 x 3/4" (450 x 450 x 19mm) consisting of
 81 - 2" (50mm) square modules.
 Actual pad sizes are as scheduled below.

Load Deflection Curves

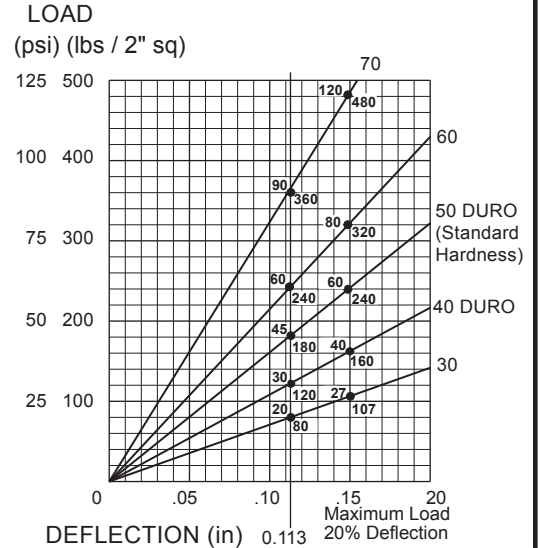

Note:
 Graph shown is for a single layer
 of 2" x 2" Super W Pad

TYPE Super W LOAD RATINGS per SQUARE

Durometer	Recommended Load per 2x2" sq.		Recommended Load per Area			Maximum Load per Area		
	(lbs)	(kg)	(lbs/in ²)	(kg/mm ²)	{kPa}	(lbs/in ²)	(kg/mm ²)	{kPa}
30	80	35	20	.014	138	27	.019	186
40	120	55	30	.021	207	40	.028	276
Standard 50	180	80	45	.032	310	60	.042	414
60	240	110	60	.042	414	80	.056	552
70	360	165	90	.063	621	120	.084	827

PLAN VIEW OF PAD LOCATION :

TAG : _____
 UNIT : _____



Durometer of Pad Material to be:		DURO
1 :	6 :	
2 :	7 :	
3 :	8 :	
4 :	9 :	
5 :	10 :	
Sets Required:		

Type SUPER W Dimensions inches (mm)

A	B